Electronic Pipettes Picus

Picus Electronic Pipettes

The most sophisticated and ergonomic pipette ever!

Picus, the winner of the Red Dot design award and the Fennia Prize Honorary Mention in 2012, is Sartorius' newest, and most ergonomic, pipette in the Biohit family. Designed to revolutionise pipetting, it is an extremely small and lightest electronic pipette on the market. This enables it to ease the user's workload and provides protection from repetitive strain injury (RSI). Its new generation technology, electronic brake and piston control system guarantee accurate and precise pipetting results. By guiding pipetting steps, the unique plate tracker increases reliability in microwell plate work. Picus is available in single-channel models, covering a volume range of 0.2–10 000 μ l and in multichannel models from 0.2 μ l to 1200 μ l.

- New ergonomic design protects you from RSI (repetitive strain injury) and eases your workload in long pipetting series
- Our lightest and smallest electronic pipette ensures an optimal working posture and offers comfortable pipetting
- New generation technology electronic brake and piston control system quarantee accurate and precise pipetting results
- Intuitive user interface learn main functions easily without a manual






Picus Electronic Pipettes 19



20 **Picus**

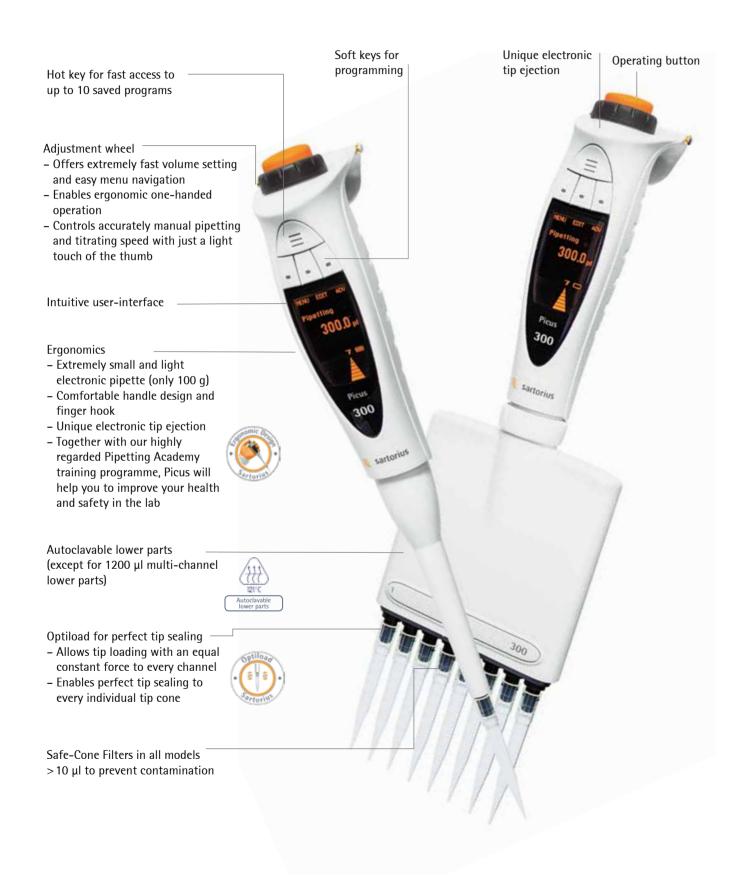



New generation technology

- Enhanced DC-motor concept takes Picus a step beyond existing technological solutions, providing outstanding performance
- Electronic brake stops piston movement rapidly and precisely, ensuring high precision, especially in serial dispensing
- Optical sensor controls and monitors piston movement in real time, ensuring unbeatable accuracy and reliability



1 2 3 4 5 6 7 8 9 10 11 12

Microwell plate tracker

- Unique built-in tracker for 96 and 384 well plates guides the user to pipette into the correct wells
- Improves work efficiency and reliability of results
- Tracker is an optional feature used in conjunction with Pipetting, Reverse Pipetting and Multi Dispensing modes













22 Electronic Pipettes Picus

Technical Features

- Calibration adjustment in 1, 2 or 3 points
- Information for service and calibration intervals
- Autoclavable lower parts (excl. 1200 μl models)
- Charging in charging stand or with micro
 USB cable
- Possible to continue working with USB charging on
- Li-Polymer battery enables charging time of approx. 1 hour



Pipetting Modes

Main Mode-		Additional Functions - to be Used in Conjunction with the Main Mode								
Available in All Picus Models	Tracker	Mixing	Counter	Excess Volume Adjustment	Auto Dispensing					
Pipetting	✓	✓	✓	✓						
Reverse Pipetting	✓	✓		✓	✓					
Manual Pipetting	✓									
Multi Dispensing	✓	✓			✓	✓				
Diluting	✓		✓							
Sequential Dispensing	✓				✓					
Multi Aspiration	✓									
Titrate	✓									

Picus Electronic Pipettes

23

Ordering Information

Picus

Cat. No.	Channels	Volume Range (μΙ)	Increment (μΙ)	Test Volume (μΙ)	Inacc. (%)	lmpr. (%)	Safe-Con Standard			SafetySpace™ Filter Tips (μl)
735021	1	0.2-10	0.01	10 5 1	0.90 1.00 2.50	0.40 0.70 1.50	-	-	10	10
735041	1	5-120	0.10	120 60 12	0.40 0.60 2.00	0.15 0.20 1.00	721008	721018	200 350	120
735061	1	10-300	0.20	300 150 30	0.40 0.60 1.50	0.15 0.20 0.80	721007	721017	350	300
735081	1	50-1000	1.00	1000 500 100	0.40 0.60 1.50	0.15 0.20 0.50	721006	721016	1000	1000
735101	1	100-5000	5.00	5000 2500 500	0.50 0.80 1.00	0.15 0.20 0.40	721005	721015	5000	-
735111	1	500-10000	10.00	10000 5000 1000	0.60 1.20 3.00	0.20 0.30 0.60	721005	721015	10000	-
735321	8	0.2-10	0.01	10 5 1	0.90 1.50 4.00	0.50 0.80 3.00	-	-	10	10
735341	8	5-120	0.10	120 60 12	0.50 0.70 2.00	0.20 0.30 1.50	721008	721018	200 350	120
735361	8	10-300	0.20	300 150 30	0.50 0.70 2.00	0.20 0.30 1.00	721007	721017	350	300
735391	8	50-1200	1.00	1200 600 120	0.50 1.00 2.50	0.20 0.30 1.00	721006	721016	1200	1200
735421	12	0.2-10	0.01	10 5 1	0.90 1.50 4.00	0.50 0.80 3.00	-	-	10	10
735441	12	5-120	0.10	120 60 12	0.50 0.70 2.00	0.20 0.30 1.50	721008	721018	200 350	120
735461	12	10-300	0.20	300 150 30	0.50 0.70 2.00	0.20 0.30 1.00	721007	721017	350	300
735491	12	50-1200	1.00	1200 600 120	0.50 1.00 2.50	0.20 0.30 1.00	721006	721016	1200	1200

All pipettes include universal AC-adaptor (EU, UK, US \mid JPN, AUS and CHN plugs)

24 Electronic Pipettes Picus



Picus Charging Options

- 1-Place Charging Stand
- 4-Place Charging Carousel
- USB cable

Picus electronic pipettes can be charged with a 1-place charging stand, a 4-place charging carousel or a direct charging USB cable. The variety of charging options has been designed for optimal utility. It is possible to continue pipetting while the Picus is being charged, using a USB cable. The compact design of the 4-pipette charging carousel is ideal for saving bench space in the laboratory. The 4-place rotating head provides easy access to the desired unit.





Ordering Information

Pipette Stands

Cat. No.	Item	
730981	Charging Stand for one pipette	
730991	Charging Carousel for 4 pipettes	
725620	Linear Stand (non-charging)	

Charging stands include universal AC-adaptor (EU, UK, US | JPN and CHN plugs)

